


WB5C | WB10C | WB15C




- 建築照明用フルカラーLED固定装置
- 高出力LEDを採用した優れた性能
- 様々な長さのLED固定装置
- 様々なビーム角度

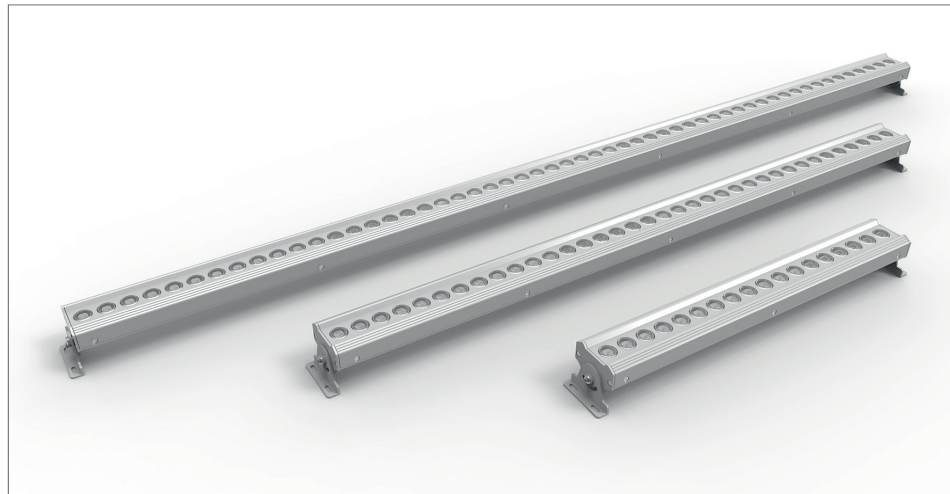


PRODUCT SPECIFICATIONS	WB5C	WB10C	WB15C
LED光源	High Power LED x 18	High Power LED x 36	High Power LED x 54
外形寸法(WxDxH)	509mm x 65mm x 62mm	977mm x 65mm x 62mm	1,445mm x 65mm x 62mm
材質	Aluminum Body & PC Lens-Cover		
重さ	1.5 kg (3.3 lbs) ±5%	2.5 kg (5.5 lbs) ±5%	3.6 kg (7.9 lbs) ±5%
消費電力	Max. 30W	Max. 60W	Max. 90W
輝度	2,400 lm (10°, 5000K)	4,800 lm (10°, 5000K)	7,200 lm (10°, 5000K)
視野角	10°, 20°, 30°, 40° x 10°		
色温度	Cool White : 5700K, 6500K Neutral White : 4000K, 5000K Warm White : 2700K, 3000K		
動作電圧	24V DC		
アドレッシング	Manual Address Setting		
防水レベル	IP66		
動作温度	-30°C ~ 60°C (-22°F ~ 140°F)		
保管温度	-40°C ~ 80°C (-40°F ~ 176°F)		

SYSTEM SPECIFICATIONS	WB5C	WB10C	WB15C
最高に連結の数	8EA	4EA	2EA

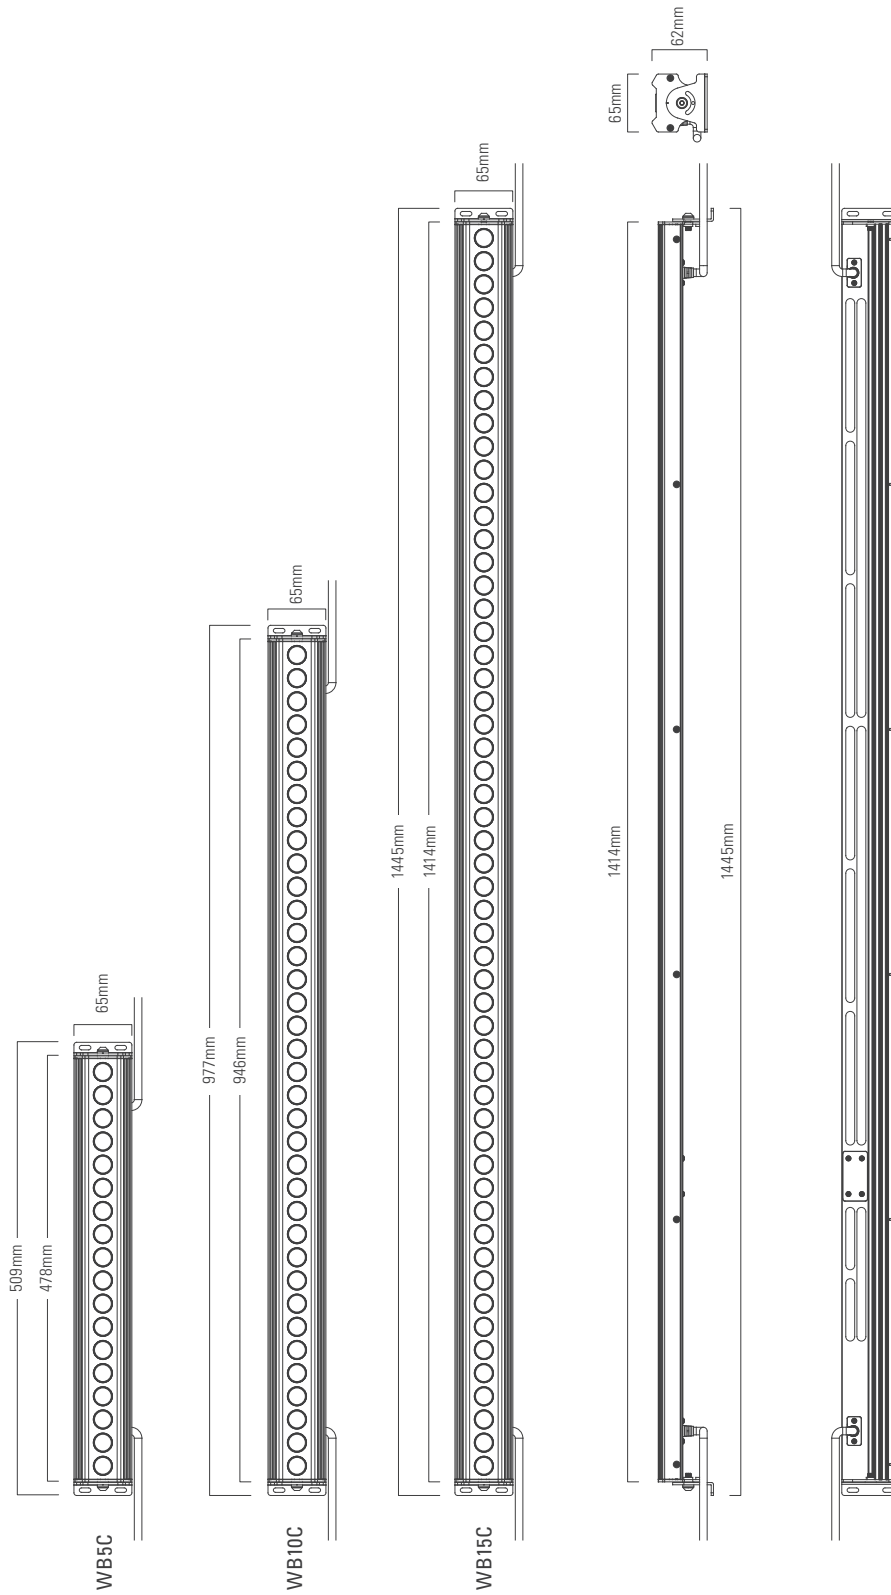

SYSTEM BLOCK DIAGRAM

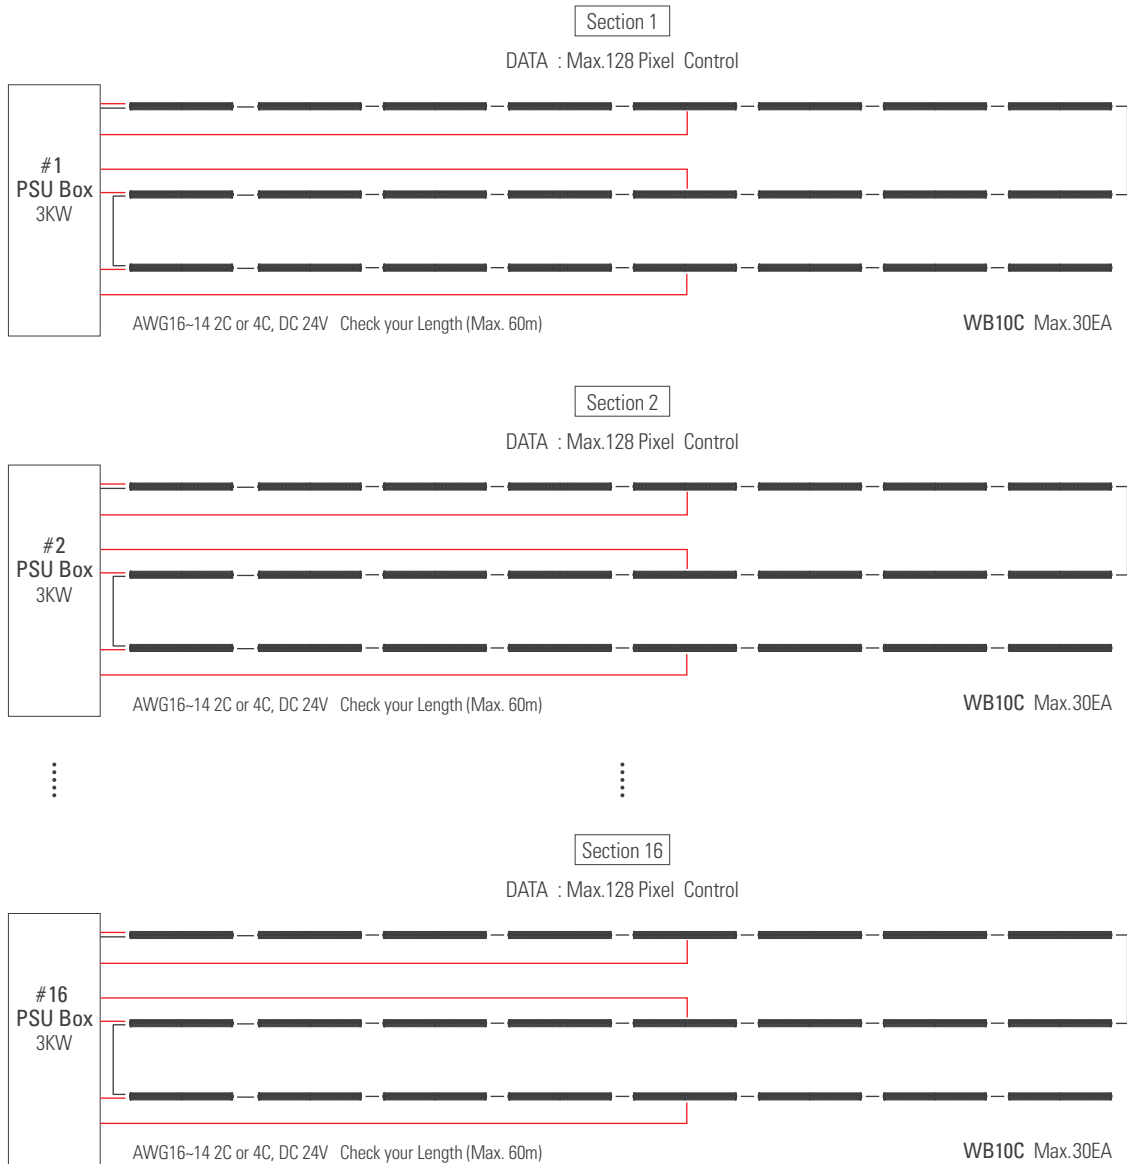


PHOTOMETRICS

GH-30BCO-7
(WB5C_White 5000K_40D)
 High Power LED×18

Color	White
Lumens	2452

Polar LDC

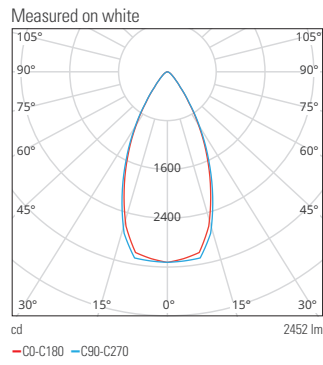

Illuminance at distance

